

# FHB Series

Fluorescent HiBay, Baffled



## FEATURES & SPECIFICATIONS

### INTENDED USE

The FHB series is offered with baffles to cut glare, is perfect for retail use, and is dressed for applications requiring aesthetic appeal. Premium full specular mirrored reflectors are standard for high efficiency lighting; white reflectors may be specified for wider distributions. The FHB series can also be configured to provide up light. Mounting options include direct surface, chain, or pendant wire, but is not suitable for stem mount.

### SIZE W x L x H in inches (mm)

4ft. - 9.25W x 48L x 4.25H

8ft. - 9.25W x 96L x 4.25H

### LAMP

2, 3, or 4 lamp positions

### MOUNTING

Surface mount or chain hung. See end of chapter T02Strip for accessory mount kits.

### MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Baffle is hinged and latched, and may be hinged from either side. Premium full specular mirrored or enhanced white reflectors are available with or without up light.

### LISTING

Fixture & Ballast: UL Listed

Ballast: Thermally protected, class P, HPF, Non PCB

### TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, cord sets, whips, fuses, occupancy sensors, and hanging kits. See options page at the end of the T02HiBay section, or contact factory for more details.

## ORDERING INFORMATION

Example: FHBL 354 M20UP E120

FHB	L	3	54	M20UP	E120
<b>Series</b>		<b>Lamp Count</b>		<b>Ballast &amp; Voltage</b>	
FHB Wide Body Strip		2, 3, or 4 (Lamps not Included)		<b>E120</b> Electronic, 120V <b>E277</b> Electronic, 277V <b>MV</b> Electronic, Multivolt (120-277) <b>H120</b> Electronic, 120V, Hi-Lume <b>H277</b> Electronic, 277V, Hi-Lume <b>HMV</b> Electronic, Multivolt, Hi-Lume <b>L120</b> Electronic, 120V, LoLume <b>L277</b> Electronic, 277V, LoLume <b>LMV</b> Electronic, Multivolt, LoLume	
<b>Baffle</b>		<b>Lamp Type &amp; Tandem Code [1]</b>			
L Baffle included X No Baffle		32 8 48 in. T8	8ft. Tandem (Double Lamp Count) [2]		
		28 8 46 in. T5	8ft. Tandem (Double Lamp Count) [2]		
		54 8 46 in. T5HO	8ft. Tandem (Double Lamp Count) [2]		
<b>Consult Factory for custom colors.</b> See end of chapter for additional options.				<b>Options</b>	
<b>Reflector</b>				<b>CS</b> 5-15P 120V 8ft. Cord & Plug <b>CS12</b> L7-15P 277V 8ft. Cord & Plug <b>CS08</b> 8ft. Cord, No Plug <b>WP</b> 6 ft. 3 wire, Whip <b>WP10</b> 6 ft. 4 wire, Whip <b>EM</b> Emergency ballast, 500 lumens <b>EM14</b> Emergency ballast, 1400 Lumens	
M20 Full Specular (Mirrored)				EM14 required for T5HO Lamps. Consult factory for occupancy and daylight sensors.	
M20UP Mirrored Reflector with uplight					
W10 White Reflector all down					
W10UP White Reflector with uplight					

HiLume and LoLume ballasts available for T8 lamps only.  
See end of chapter for additional ballast options.

T8 and T5HO lamps, all color temperatures available.

Ask about the new T55 lamp. Operates on any 48 in. T8 fixture.

[1] See end of T02HiBay section for many additional lamps, ballasts, finishes, and options.  
[2] T5 & T5HO HiBays are full 24/36/48/96in. length.

Catalog Number:
Notes:


# FHB Series

Fluorescent HiBay, Baffled



## DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.

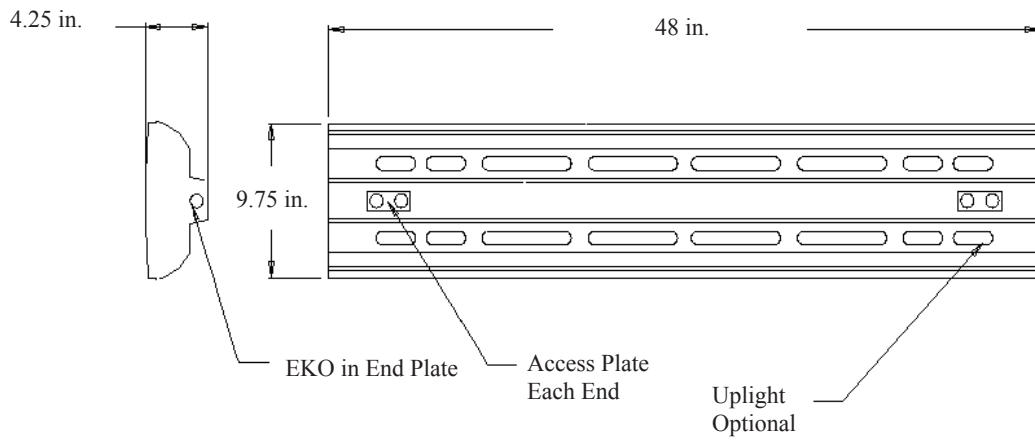

Catalog Number:
Notes: