

12/17/2012

All LED Exit/Emergency Combo

Features

- Energy-efficient LED technology
- EZ snap-out chevron directional indicators
- Combines an EXIT sign & emergency light into one low-profile unit
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Electrical

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 9.6V, long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board & LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
HL0314 (Red Letters)	3.7	3.8	0.040	0.020
HL0314 (Green Letters) HL0314 (Green Letters) - RC	3.0	3.2	0.030	0.014
HL0314 (Red Letters) - RC	3.4	3.6	0.033	0.015
HL0314 (Red & Green) - SDT HL0314 (Red & Green) - RC - SDT	5.2	5.7	0.046	0.022

Illumination

- Long lasting, efficiency ultra-bright white LED lamp heads
- 1 watt (8 LEDs x 0.125 watt) per head
- High-performance smooth chrome plated metalized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provide optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long-life, energy efficient Red or Green LED exit sign illumination

ORDERING INFORMATION

Model Family #	Number of Faces	Letter Color	Housing Color	Options
HL0314	3 - Universal	R - Red G - Green	B - Black W - White	RC - Remote Capable HTR - Internal Heater HL - High Lumen

Example model# HL0314 3 R W

Specifications subject to change without notice.

Project:	
Catalog#:	
Approved by:	




Housing

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish
- EZ snap-out Chevron directional indicators

Mounting

- EZ-snap mounting canopy included for top or end mount
- Universal K/O patten on back plate for wall mount

Dimensions

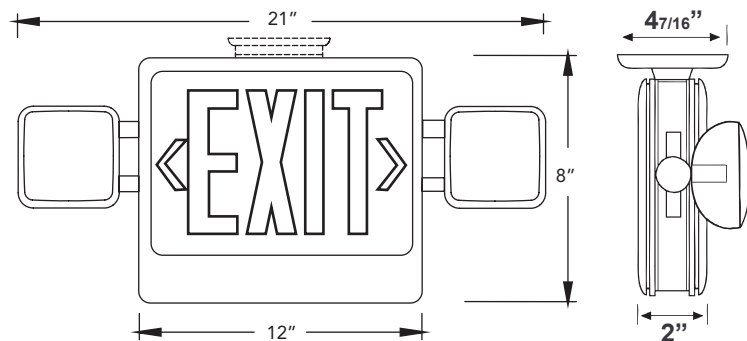

Exit/Emergency Combo