

SHPARA Series

Surface Mounted Parabolic with Shroud



FEATURES & SPECIFICATIONS

INTENDED USE

Mid level, specification grade, surface mounted, high performance, deep cell parabolic luminaire designed for maximum efficiency and visual comfort. Black reveal optional. Available in 2'x2', 2'x4', and 1'x4' configurations.

Available with various lamp and parabolic cell configurations. For use in

SIZE W x L x H in inches (mm)

1x4 - 11.75W x 48.0L x 5.0Dp

2x2 - 23.75W x 24.0L x 5.0Dp

2x4 - 23.75W x 48.0L x 5.0Dp

LAMP

2, 3, or 4 lamp positions

CONSTRUCTION

Die formed and spot welded, 22 gauge cold rolled steel housing assembly. Die formed, cold rolled steel reveal. Precision formed, anodized no. 603 semispecular aluminum, louver. Standard nominal 3" deep cell louvers are manufactured using interlocked construction and mitred corners. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. A protective film or bag is provided to protect the louver and fixture from construction dust. Louver hinges from either side. Latches use a positive locking cam action and come with matching finish.

MOUNTING

Mounting holes are provided within offset to prevent distortion of housing when tightening mounting fasteners.

OPTICS

Fixture & Ballast: UL Listed

Ballast: Thermally protected, class P, HPF, Non PCB

TYPICAL OPTIONS AND ACCESSORIES

Emergency ballasts, Cord sets, whips, occupancy sensors Hanging kits, Wire guards. Contact factory for additional options.

ORDERING INFORMATION

Example: SHPARA18C432MV

SHPARA		18C		4		32		MV	
Series		Lamp Count		Ballast & Voltage [1]		Lamp Type [1]		Options [1]	
SHPARA Surface Mounted Parabolic		2*, 3, or 4 Lamps Not included *For 1x4 version Add "-12" after lamping to designate size,		E120 Electronic, 120V E277 Electronic, 277V MV Electronic, Multivolt (120-277) H120 Electronic, 120V, Hi-Lume [3] H277 Electronic, 277V, Hi-Lume [3] HMV Electronic, Multivolt, Hi-Lume [3]		14 22 in. T5 17 24 in. T8 24 22 in. T5HO 32U 24 in. T8 U-bend 6" leg 28 46 in. T5 32 48 in. T8 54 46 in. T5HO		CS 5-15P 120V 8ft. Cord & Plug CS12 L7-15P 277V 8ft. Cord & Plug CS08 8ft. Cord, No Plug WP 6 ft. 3 wire, Whip WP10 6 ft. 4 wire, Whip EM Emergency ballast, 500 lumens EM14 Emergency ballast, 1400 lumens	
Louver Cell Count & Material [2]									
8C	8 cell (1x8 pattern) semi-specular, 3 in. nominal								
9C	9 cell (3x3 pattern) semi-specular, 3 in. nominal								
12C	12 cell (2x6 pattern) semi-specular, 3 in. nominal								
18C	12 cell (2x6 pattern) semi-specular, 3 in. nominal								
32C	12 cell (2x6 pattern) semi-specular, 3 in. nominal								
24C	12 cell (2x6 pattern) semi-specular, 3 in. nominal								
18F	12 cell (2x6 pattern) semi-specular, 3 in. nominal								
32F	12 cell (2x6 pattern) semi-specular, 3 in. nominal								
18W	12 cell (2x6 pattern) semi-specular, 3 in. nominal								
32W	12 cell (2x6 pattern) semi-specular, 3 in. nominal								

Notes

[1] See end of T02SURF for many additional lamps, ballasts, finishes, and options.

[2] Custom louvers available in any cell configuration. Consult factory for additional information.

[3] HiLume and LoLume ballasts available for T8 lamps only.

Note: EM14 required for T5HO lamps

Catalog Number:

Notes:

SHPARA Series


Surface Mounted Parabolic with Shroud





DIMENSIONS

All dimensions are inches. Specifications subject to change without notice.


SIDE VIEW

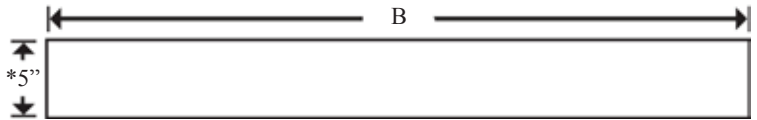


TOP VIEWS

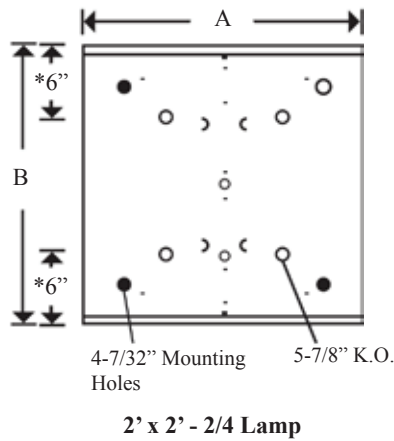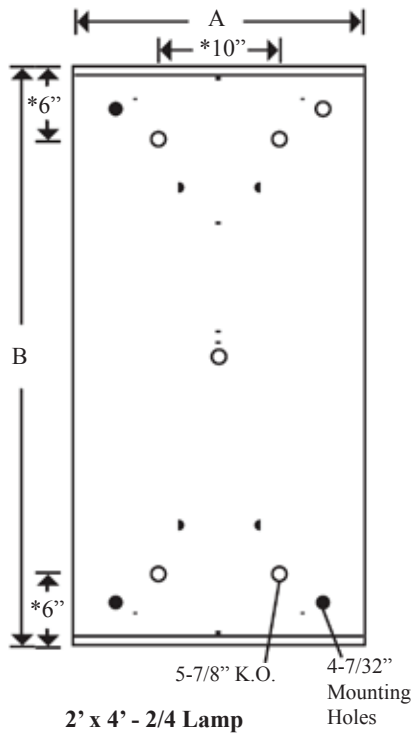


SECTION VIEWS



1' x 4' - 2 Lamp




2' x 2' & 2' x 4' - 2 Lamp

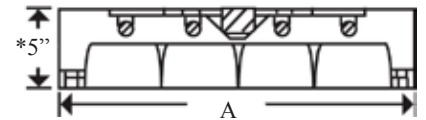

2' x 2' & 2' x 4' - 4 Lamp

Candlepower Curve

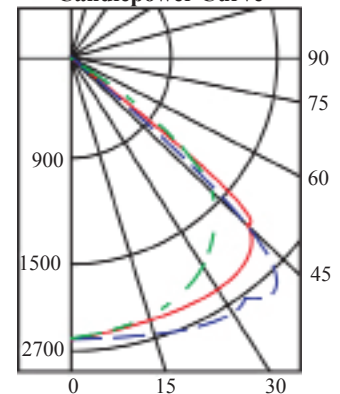

Model Configuration	A	B
1' x 4'	12"	48"
2' x 2'	24"	24"
2' x 4'	24"	48"

* Housing Depth 5 1/2" Prior to Mid 2002.

Catalog Number:
Notes: