

LED
TECHNOLOGY

15,000 Hours Life, 5 Watt, 120VAC

Applications:

Replace 60w J78 Halogen Lamp




For use in



Work Lights
Flood Light
Exterior Wall Lights
Torchiere Lamps
and More

Features:

- Replace Existing 60W Halogen And Save 80% Energy
- Instant On, Instant bright, Last up to 15,000 hours
- No UV Or Infrared Radiation
- Miniature Size for Better Fit

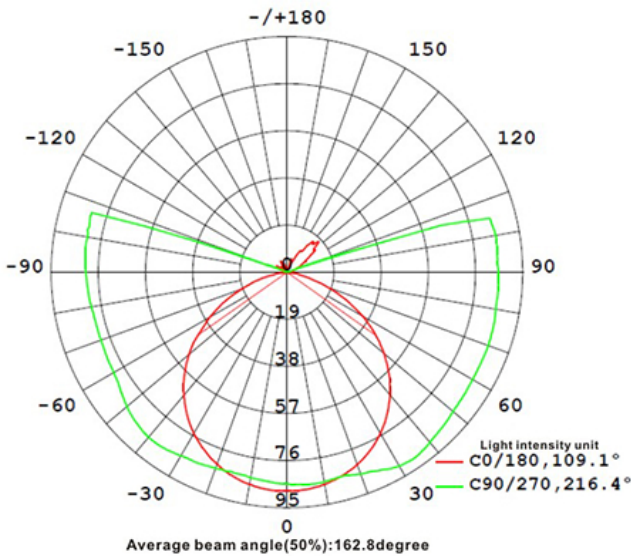

Specification:

Input Line Voltage:	120VAC
Input Power	5W
Input Line Frequency	60Hz
Lamp Life (Rated)	15,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	40°C/104°F
CCT	3000K
CRI	≥80
CBCP	90
Lumens	550
Beam Angle	360°

Height	E Avg/E Max	Beam Angle 109.12° Deg	Diameter
1m	32.13, 88.27lx		281.01cm
2m	8.033, 22.07lx		562.02cm
3m	3.570, 9.808lx		843.03cm
4m	2.008, 5.517lx		1124.04cm
5m	1.285, 3.531lx		1405.06cm
6m	0.8925, 2.452lx		1686.07cm
7m	0.6557, 1.801lx		1967.08cm
8m	0.5020, 1.379lx		2248.09cm
9m	0.3967, 1.090lx		2529.10cm
10m	0.3213, 0.8827lx		2810.11cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY	Model:#	Description	wattage	Incandescent Equivalent	lumens	base
1-YEAR *	LB60J78/WW	5Watt J78 Lamp 3000K Warm White	5W	60W	550	R7S

*Based on 3hours usage a day

UPC: 74616080019-6