

### 30 Amp 125/250-Volt NEMA 14-30R Flush Mount Power Outlet



Model No.: 66300-BK


**Description:** Enerlites's NEMA devices provide a safe disconnect solution between an equipment load and a power source. Built of durable thermoplastic, power receptacles come equipped with heavy-gauge, double-wire copper alloy contacts. To ensure correct and speedy wiring, terminals have ID markings. Flush mount receptacles fit Enerlites's wide range of 2.15 in. diameter wall plates

**Features:**

- Fits all wall plates with 2.15 in. Diameter center hole
- Terminals marked for easy identification and fast wiring
- All mounting hardware included
- Flush-mount devices fit single or 2-Gang outlet boxes
- Easy-to-wire terminals accept up to number 4 AWG conductors
- Flammability UL94, V2 Rating
- High Impact-Resistant Chemical-Resistant Nylon
- Reinforced Thermoplastic Polyester

**Specifications:**

Type.....	Outlet
Rating.....	30Amp, 125/250Volt
Wiring Scheme.....	3 Pole, 4 Wire
Nema Configuration.....	14-30R
Max Working Voltage.....	30Amp
Termination.....	4AWG Conductors
Standards and Certifications.....	UL Listed

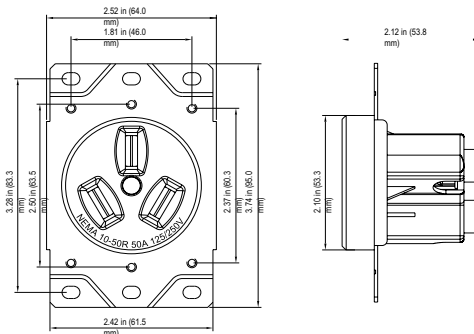

**Testing and Code Compliances**



Enerlites, Inc.

[www.enerlites.com](http://www.enerlites.com)

Phone: 949-756-0536 Fax: 949-756-0528 e-mail: [sales@enerlites.com](mailto:sales@enerlites.com)