

Wireless Home Automation In-wall Smart Meter TR Duplex Receptacle with Interchangeable Face Cover

Model No: WF15RM

Description

Smart Wi-Fi Duplex TR Receptacle with Energy Monitoring. Complete your home automation by replacing current outlets with this duplex receptacle, equipped with Wi-Fi and energy monitoring capabilities.

Personalize it by saving your location and use it as a trigger in a scene; use it to turn on a heater when the weather calls for a snowy day or turn on the Fan If the forecast is sunny and hot. Control your lights and small appliances from a mobile device and the ENERWAVE App. Schedule your lights, run a timer, create scenes, or check the On/Off status to monitor and save energy. Activate and use voice commands on Alexa or Google Assistant (sold separately) for hands-free control.

Features


- Perfect replacement for regular receptacle, 125VAC, 15Amp.
- Customize and save scenes, set schedules, run timers and use other advanced features; create an “away” scene to randomize light schedules for added security while on vacation.
- Manual and Remote ON/OFF control of any connected lighting and other electrical load for WiFi controlled outlet.
- Smart meter gives you real time energy usage.
- Reduce energy consumption and enjoy Wireless Home Automation.
- 3 Interchangeable Color Face Plates included (white, light almond, and black).
- Enhance the value and technology of your home.

Specifications

Manufacturer	Enerwave
Included 3 covers	White, Light Almond, and Black
Voltage	120VAC, 60Hz
Maximum load	1000W Incandescent, ½ HP Motor, 1200VA Ballast, 1800W (15A) Resistive
Protocol	IEEE 802.11 a/b/g/n
Range	Dependent on Local Internet Wireless Router
Terminations	Line, Neutral, Load, Traveler and Ground
Operating Temperature	32°F – 104°F (0°C -40 °C) Indoor Use
Warranty	2 years

Standards & Compliance

WiFi Certified FCC, Part 15
Class B UL, CUL Listed

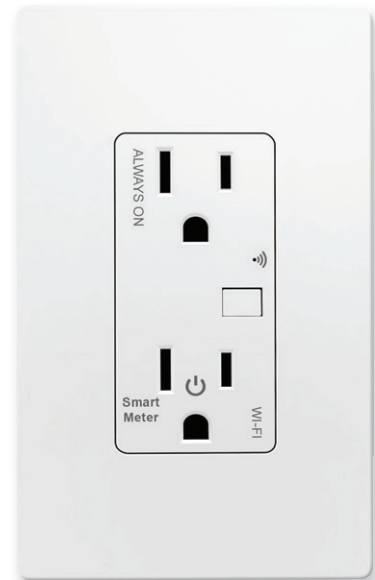

Wireless Home Automation In-wall Smart Meter TR Duplex Receptacle with Interchangeable Face Cover

Model No: WF15RM

INITIAL SET UP FOR Wi-Fi CONTROL

- Connect The WF15RM, Then turn on the circuit breaker.
- Connect your Smart Device to the same 2.4GHz Wi-Fi network that your WF15RM outlet will be connecting to.
- Use your mobile device and search “ENERWAVE” from the App Store or Google Play.
- Once installed, open the App and follow the on-screen instructions to register and log-in.
- Follow the instructions in the App to connect the Wi-Fi Outlet to your network.
- Over time, the App may be updated for a better experience or added features, so be sure to follow the in-App instructions closely.

CHANGING THE FACE COVER

- To replace the face cover, use a flat screwdriver and insert the tip at the gap shown in the diagram and pry the cover off.
- To reinstall, simply align the cover and snap back on.

