



INSTALLATION INSTRUCTIONS


MODELS: 82085-SU, 82086-SU, 82088-SU, 82089-SU, 82091-SU, 82092-SU
82094-SU, 82095-SU
LED CUBELITE WRAP AROUND FIXTURE

Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING: Avoid fire or electric shock. Follow installation instructions carefully. If unsure about electrical installation, consult a qualified electrician. Wear rubber-soled shoes and work on a sturdy wooden ladder. Ground fixture to avoid potential electric shock. Handle metal parts carefully to prevent cuts. To avoid a hazard to children, account for all parts and destroy all packing materials.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Turn off the power at fuse or circuit breaker box before installation and maintenance. NOTE: This fixture is suitable for 120-277 Volt fused circuits. Fixture must be installed according to National Electric Code and local building codes. If you are unsure about wiring, consult a qualified electrician. Suitable for Damp Locations.




DIMMABLE

Compatible with most wall based 0-10V dimming controllers




Installation

Figure 1

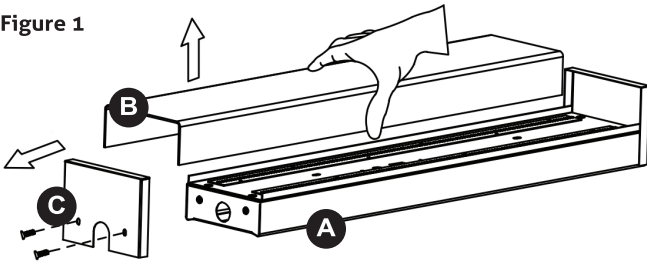


Remove lens (B) from fixture (A) by removing screws from side panel (C).

Figure 2

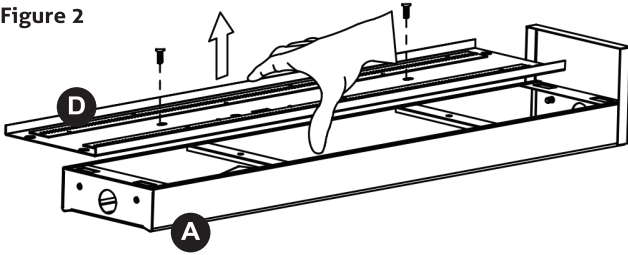


Remove LED panel (D) from fixture (A) by removing screws.

Figure 3

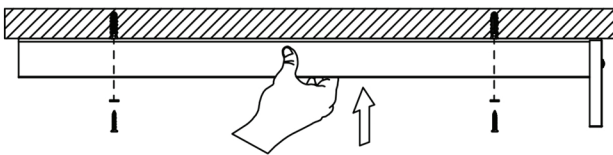

Mark locations of mounting holes at both ends of the fixture and drill pilot holes into ceiling studs. Secure fixture to ceiling using wood screws.

Figure 4

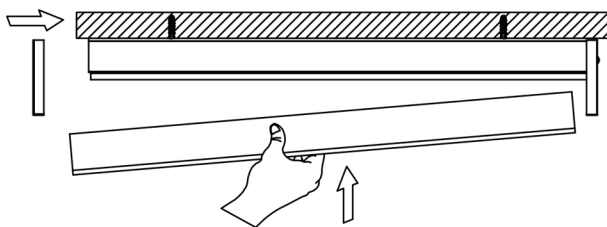

Place lens back onto fixture and secure with side plate and screws.

Sunshine Lighting Company

744 Clinton Street Brooklyn, NY 11231, USA

T. 718.768.7000

F. 718.768.0970

www.sunlite.com