

Plug and Play 46" LED T5 Lamp

LED


25Watts, T5 Plug-N-Play (On Existing Ballast)
T5-HO Replacement

Features:

- Single direction of illumination reduces up-light wastage
- Cool White And Day Light, High CRI Lamp
- Can be operated in luminaire with or without diffuser
- Contains No Mercury
- No UV or infrared radiation
- All in one operates on most ballasts



A Better Bulb

- The chips are LM-80 tested
- The chips are mounted on an aluminum circuit board (PCB)
- Burn-in test performed on every lamp
- Wide beam angle

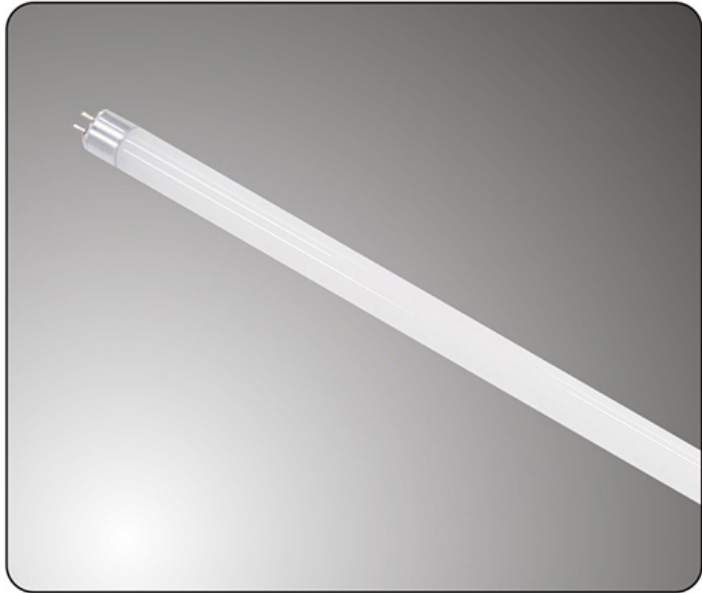

Specification:

Input Line Voltage:.....	Ballast
Input Power.....	25W
Input Line Frequency.....	60Hz
Lamp Life (Rated).....	50,000hrs
Minimum Starting Temp Preferred.....	-20°C/-4°F
Maximum Operating Temp Preferred.....	50°C/124°F
CCT.....	4000K/5000K
CRI.....	≥80
Lumens.....	3500/3500/3500
Beam Angle.....	185°

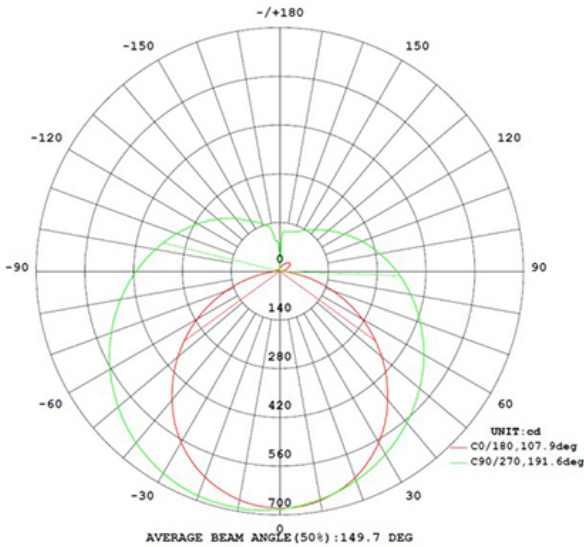

WARRANTY
5-YEARS *

Model:#	Description	Wattage	Lumens	Base
LB46T5-PNP/840	25W 46" T5 Plug-N-Play Retrofit Lamp Cool White, DLC listed	25W	3500	G5
LB46T5-PNP/850	25W 46" T5 Plug-N-Play Retrofit Lamp Day Light, DLC listed	25W	3500	G5

*5 Years Limited Warranty

UPC: LB46T5-PNP/840 806802-154183
 10PACK 806802-154312
 LB48T8-PNP/850 806802-154190
 10PACK 806802-154329

Cyber Tech Lighting, Inc.
 331 S. Hale Ave. Fullerton, CA 92831 USA.
 Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795
 www.cybertechlighting.com

