

**Residential Grade  
2-Gang Floor Box Assembly with 20A Duplex  
T&WR Receptacle Screw Cover Type**  
Model No.: 977510/975510-X-D



975510-C



975510-SS



975510-SS-D



975510-C-D

\*X refers to color code.

**Description:**

The 2-Gang Floor Box Assembly Duplex Tamper & Weather Resistant Screw Cover Type is used for carpet and wood floors. Covers can be unscrewed, providing easy access to power and can be closed when not in use. Kit assembly includes a metal floor box, a duplex T&WR receptacle and/or Datacom and a cover.

**Features:**

- Two 20A 125V Duplex Tamper & Weather Resistant Receptacles or one 20A 125V Duplex Tamper & Weather Resistant Receptacle and one data port.
- For use with carpet and wood floors.
- Steel floor box must be flush with the wood sub-floor prior to final installation.
- Easy connection wiring accepts #12-10 AWG stranded and solid copper wire.


**Specifications:**

Cover Material .....Brass(C) or Stainless Steel (SS)  
 Cover Type ..... Screw  
 Cover size..... 5" (127mm) x 5" (127mm)  
 Receptacle Rating: ..... 20A 125VAC  
 Box:  
 Box Type ..... FB-07 Two 1-Gang Box (3"x3-1/2"x3-3/4")  
 Box Material..... Pre-Galvanized Steel  
 Knockout Size.....1/2"  
 Adjustable Height ..... Up to 1" depth  
 Warranty..... 2 Years

**Testing & Code Compliance:**

- Compliance with 2011 NEC Article 406.12 for tamper-resistant receptacles.
- Compliance with 2011 NEC Article 314.27 for floor boxes.
- All tamper resistant receptacles are UL listed.
- UL listed.

**Dimensions:**

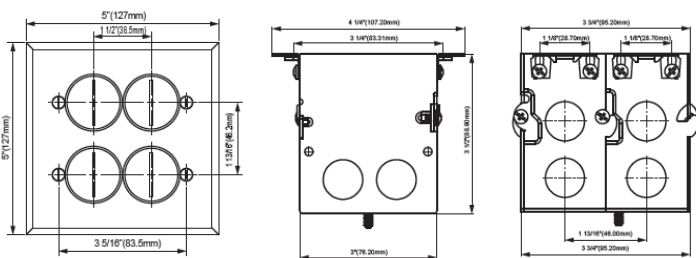

Cat.No.	Box Type	Receptacle/Datacom	Cover Type	Finish
975510-C	FB-07 Two 1-Gang Box (3"(76.20mm) x 3-1/2"(88.90mm) x 3-3/4"(95.20mm))	62040-TWR-W Two Duplex T&WR Receptacles	Screw	Brass
975510-SS				Stainless Steel
975510-C-D	FB-07 Two 1-Gang Box (3"(76.20mm) x 3-1/2"(88.90mm) x 3-3/4"(95.20mm))	62040-TWR-W Duplex T&WR Receptacle and 6500-W Data Port	Screw	Brass
975510-SS-D				Stainless Steel