



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series 207

LED Shallow Economy Wraparound


A shallow economy designed wrap around LED luminaire available for the use in either two or four foot lengths. Low initial cost, maintenance free, this series also delivers excellent brightness control.

CONSTRUCTION

Completely die formed from heavy gauge cold rolled steel. Design embossed ends are locked and secures to the housing. Wireway cover snaps on or off without tools.

DIFFUSERS

A crystal clear diffuser extruded from 100% virgin acrylic that will maintain its color under normal conditions, indefinitely. Linear prisms on the interior side walls direct the light ceilingwards, which can then refract back down, The bottom is composed of an evenly spaced pattern of conical prisms yielding low brightness, glarefree diffused light. Diffuser is lift and shift for ease of relamping and cleaning and is capable of hanging down from either side of the housing.

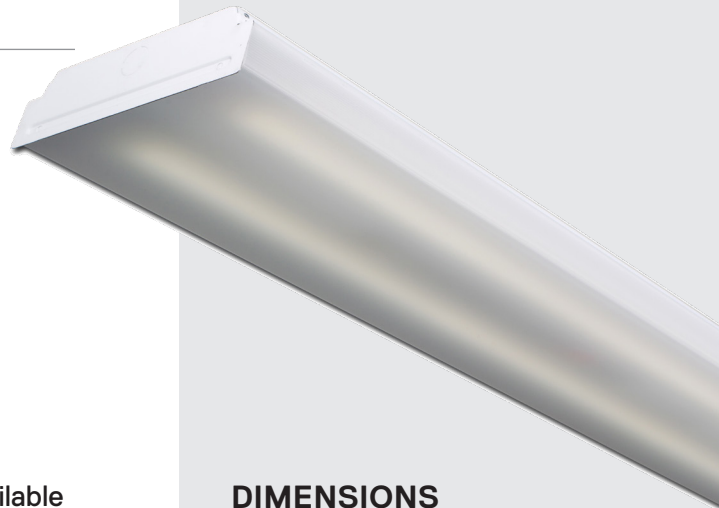

DIMENSIONS

- 4 ft.- 7.625W x 48L x 3Dp
- 4 ft.- 13W x 48L x 3Dp
- 2 ft.- 7.625W x 24L x 3Dp
- 2 ft.- 13W x 24L x 3Dp


FEATURES & BENEFITS

- Suitable for individual or continuous run installations.
- May be surface or pendant mounted.
- Various lenses lie on the side flanges of fixture. Six and eight foot units have a steel mullion to join two individual diffusers. Baffled louver available to shield glare.
- Choice of LED arrays and drivers to meet a range of full distribution output and wattage choices.
- Suitable for dry and damp locations
- 50,000 hrs of L70 LED life
- CRI >80
- 0-10 Volt dimmable 120-277V
- Power factor 0.99
- 5 year warranty




DRAWINGS & IMAGES



2x2 - Back

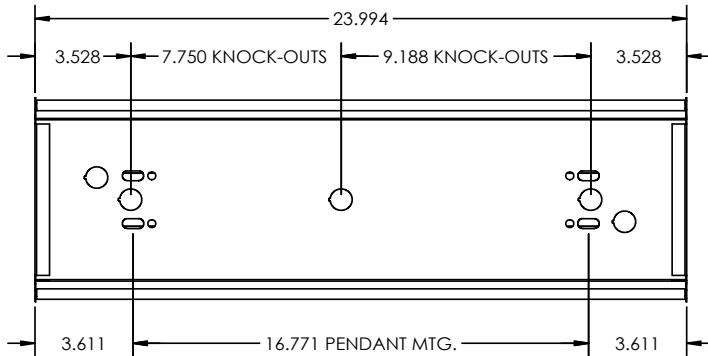

2x4 - Back

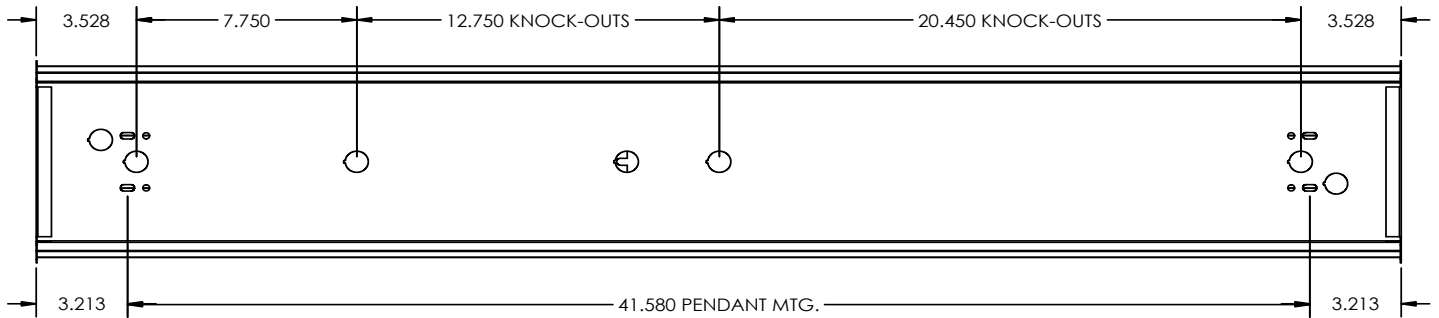

End

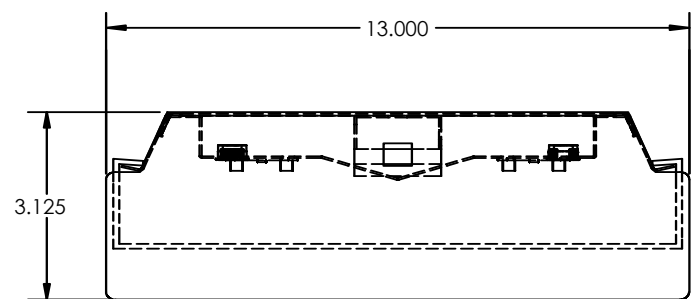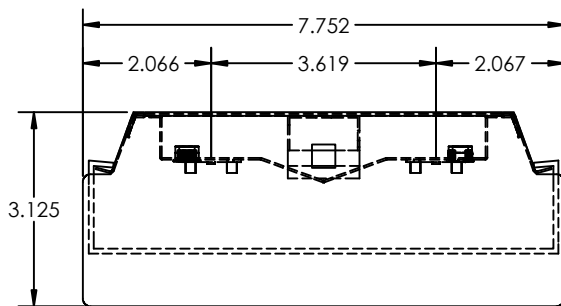



Texas Fluorescents
Reinvented

CATALOG#: _____
PROJECT: _____
TYPE: _____

Series 207
LED Shallow Economy
Wraparound

ORDER INFORMATION

4 Ft.

| SERIES | LENS MATERIAL | WIDTH | SIZE | WATTAGE & LUMENS | DRIVER | COLOR |
|--------|---------------------------------|----------|---------|--|-------------------|--|
| 207 | A Prismatic Acrylic #12 Pattern | 2 7.625" | 48L 48" | V37W4500L 37 Watts 4500 Lumens | DMV 0-10V Dimming | 30K 3000K 35K 3500K 40K 4000K 50K 5000K |
| | FR Frosted Lens | 2 7.625" | 48L 48" | S32W3950L 32 Watts 3950 Lumens | | |
| | | 4 13" | | S48W5500L 48 Watts 5500 Lumens S57W6300L 57 Watts 6300 Lumen * * | | |

2Ft.

| SERIES | LENS MATERIAL | WIDTH | SIZE | WATTAGE & LUMENS | DRIVER | COLOR |
|--------|---------------------------------|----------|---------|---|-------------------|--|
| 207 | A Prismatic Acrylic #12 Pattern | 2 7.625" | 24L 24" | V22W2650L 22 Watts 2650 Lumens | DMV 0-10V Dimming | 30K 3000K 35K 3500K 40K 4000K 50K 5000K |
| | FR Frosted Lens | 2 7.625" | 24L 24" | S24W2800L 24 Watts 2800 Lumens | | |
| | | 4 13" | | S28W3100L 28 Watts 3100 Lumens S30W3300L 30 Watts 3300 Lumens * * | | |

DLC Listed Items

| ITEM NUMBER |
|-------------------------|
| 207A224LV22W2650LDMV30K |
| 207A224LV22W2650LDMV35K |
| 207A224LV22W2650LDMV40K |
| 207A224LV22W2650LDMV50K |
| 207A248LV37W4500LDMV30K |
| 207A248LV37W4500LDMV35K |
| 207A248LV37W4500LDMV40K |
| 207A248LV37W4500LDMV50K |



Note:

*Programmable LED drivers allow custom configured wattages and corresponding lumens.

We reserve the right to change design, materials, LED's and finish in any way that will not alter installed appearance or reduce function and performance.