

LED
TECHNOLOGY

50,000 Hours Life, 27Watt, 120-277VAC

Applications:

6" LED Recess Can,
Indoor And Damp Locations Use



Switch Colors Before Installing
3000K Soft Warm White
3500K Bright Warm White
4000K Cool White



Features:

- Replace Fluorescent Or HID 6" Trims (250 Watt Equivalent)
- Easy Installation Spring Clips
- IC Rated New Construction Can Be Installed Without Frame
- Can Fit Existing Standard 6Inch Recess Frames
- 3 color adjustable 3000K, 3500K or 4000K
- 0-10V Dimming



Specification:

Input Line Voltage:	120-277VAC
Input Power	27W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	40°C/104°F
CCT Adjustable	3000K/3500K/4000K
CRI	≥80
Lumens	2700
Beam Angle	90°
CBCP	2058

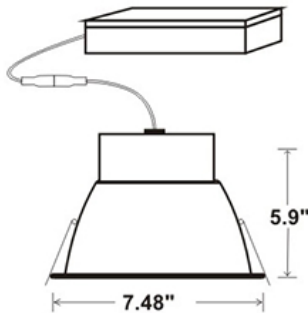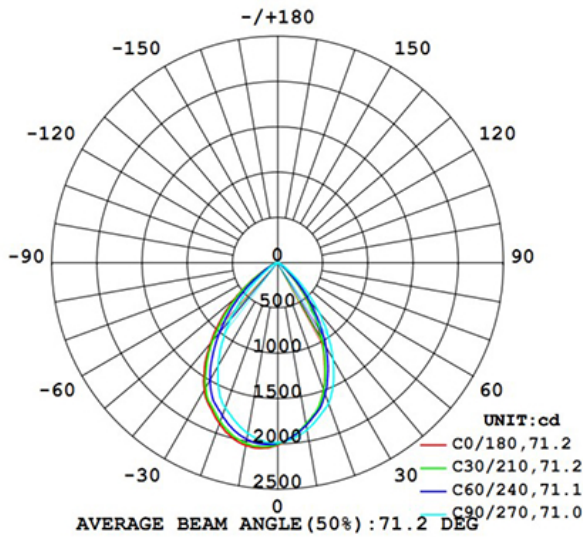

Height	Eavg, Emax	Angle: 70.54deg	Diameter
1.219m	723.0, 1370lx		172.45cm
2m	268.7, 509.0lx		282.88cm
3m	119.4, 226.2lx		424.32cm
4m	67.17, 127.2lx		565.77cm
5m	42.99, 81.43lx		707.21cm
6m	29.85, 56.55lx		848.65cm
7m	21.93, 41.55lx		990.09cm
8m	16.79, 31.81lx		1131.53cm
9m	13.27, 25.13lx		1272.97cm
10m	10.75, 20.36lx		1414.41cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

If Needed Commercial Frame Available, Sold Separately

WARRANTY
2-YEAR*

Model:#	Description	wattage	lumens	Socket
LC27RT6-AR/CCT	6 Inch, Retrofit Can Kit, IC, Aluminum Reflector, Adjustable to Soft Warm White - Bright Warm White - Cool White	27W	2700	Hard Wire

*2 Year Limited Warranty

UPC: 680596-581826

