

## Commercial Grade 2-Gang Pop-up Floor Box Assembly

Model No.: 962301/962301-X-D



962301-C



962301-S



962301-C-D



962301-S-D

\*X refers to color code.

### Description:

The 2-Gang Pop-up Floor Box Assembly is used for carpet and wood floors. Pop-up covers provide easy access to power and internet access and can be snapped closed when not in use. Kit assembly includes a metal floor box, two decorator duplex T&WR receptacles or one decorator duplex T&WR receptacle and RJ45 ports and a cover.


### Features:

- Two 20A 125V Duplex Tamper & Weather Resistant Receptacles or one 20A 125V Duplex Tamper & Weather Resistant Receptacles and RJ45 ports.
- For use with carpet and wood floors. Also great for counter-top applications.
- Steel floor box must be flush or attached to sub-floor prior to final installation.
- Easy connection wiring accepts #12-10 AWG stranded and solid copper wire.

### Testing & Code Compliance:

- Compliance with 2011 NEC Article 406.12 for tamper-resistant receptacles.
- Compliance with 2011 NEC Article 314.27 for floor boxes.
- All tamper resistant receptacles are UL listed.

### Dimensions:

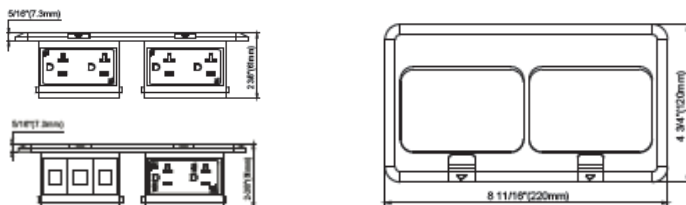

### Specifications:

Cover Material .....Brass(C) or Nickel-Plated Brass (S)  
 Cover Type ..... Rectangular  
 Cover size.....8-11/16" (220mm) x 4-13/16" (122mm)  
 Receptacle Rating: ..... 20A 125VAC  
 Box:  
 Box Type .....FB-12 4"x7-15/16"x3"  
 Box Material..... Pre-Galvanized Steel  
 Knockout Size..... 1/2" and 3/4"  
 Adjustable Height ..... Up to 1" depth  
 Warranty..... 2 Years

Cat.No.	Box Type	Receptacle /Datacom	Cover Type	Finish
962301-C	FB-12 4"(101.6mm) x 7-15/16" (201.6mm) x3"(76.2mm)	63200- TWR-W (Decorator Duplex T&WR Receptacle)	Rectangular	Brass
962301-S				Nickel
962301-C-D	FB-12 4"(101.6mm) x 7-15/16" (201.6mm) x3"(76.2mm)	63200- TWR-W (Decorator Duplex T&WR Receptacle and RJ45 ports)	Rectangular	Brass
962301-S-D				Nickel