

Series IND

Medium Body Strip with Reflectors

FEATURES & SPECIFICATIONS

INTENDED USE

Medium body industrial strip with reflectors for interior warehouse, retail, and utility areas requiring concentrated illumination in a commercial quality configuration.


SIZE W x L x H in inches (mm)

Fixture width and height vary with reflector selection
Fixture length = 48" or 96" length

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Body finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Reflectors attach with quarter turn fasteners; no tools required for ballast access. End plate doubles as coupler for continuous row mounts. Reflectors available in different materials. See C Series for similar fixtures with no reflectors.

- W3x, economical white steel reflectors, for abusive locations
 - Three styles: symmetric, symmetric with uplight, and asymmetric
- M2, premium full specular (mirrored) reflectors, for maximum efficiency
 - Four styles: Low (8-10ft), Standard (9-14ft), and High Ceiling (12-24ft), and asymmetric
- W1x, white steel reflectors, combine economy and efficiency
 - Two styles: Standard (9-14), and High ceiling (12-24ft) symmetric

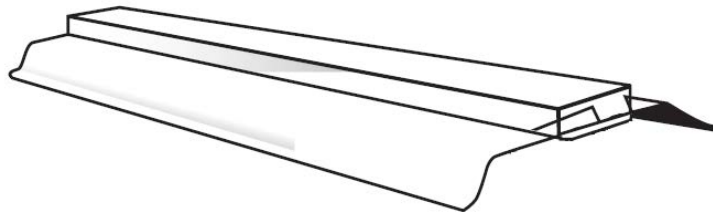

MOUNTING

Surface mount, chain hung, double stem. See end of chapter T02Strip for accessory mount kits.

TYPICAL OPTIONS AND ACCESSORIES

Whips, fuses, wire guards, and "EM" - Emergency battery backup, IOTA ILBCP10. Consult factory for more options.



ORDERING INFORMATION

STANDARD

Example: IND48LS57W6400LW30DMV40K

IND	48L	S57W6400L	W30	DMV	40K
Series	Width	Wattage and Lumen	Reflectors	Driver	Color Temperature
IND Medium Body Strip with Reflectors	48L 48"	S32W4050L 32 System Watts, 4050 Delivered Lumens S48W5650L 48 System Watts, 5650 Delivered Lumens S57W6400L 57 System Watts, 6400 Delivered Lumens	W3 0 White Steel Reflector W3 5 White Steel Reflector Asymmetric	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K


HIGH OUTPUT

Example: IND48LH72W8200LW30DMV40K

IND	48L	H72W8200L	W30	DMV	40K
Series	Width	Wattage and Lumen	Reflectors	Driver	Color Temperature
IND Medium Body Strip with Reflector	48L 48"	H72W8200L 72 System Watts, 8200 Delivered Lumens	W3 0 White Steel Reflector W3 5 White Steel Reflector Asymmetric	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K

*Consult for more options

Catalog Number:
Notes:

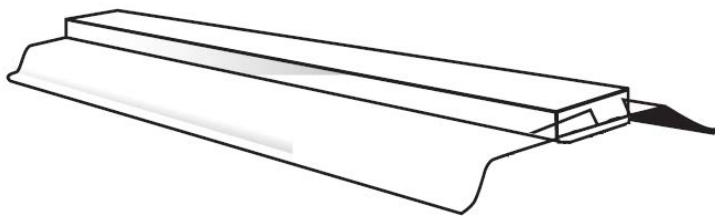

DIMENSIONS

All dimensions are inches. Specifications subject to change without notice

ORDERING INFORMATION STANDARD

Example: IND96LS97W11300LW30DMV40K

IND	96L	S97W11300L	W30	DMV	40K
Series	Width	Wattage and Lumen	Reflectors	Driver	Color Temperature
IND Medium Body Strip with Reflectors	96L 96"	S48W5650L 48 System Watts, 5650 Delivered Lumens S97W11300L 97 System Watts, 11300 Delivered Lumens S114W12800L 114 System Watts, 12800 Delivered Lumens	W3 0 White Steel Reflector W3 5 White Steel Reflector Asymmetric	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K

HIGH OUTPUT

Example: IND48LH144W16400LW30DMV40K

IND	96L	H144W16400L	W30	DMV	40K
Series	Width	Wattage and Lumen	Reflectors	Driver	Color Temperature
IND Medium Body Strip with Reflector	96L 96"	H144W16400L* 144 System Watts, 16400 Delivered Lumens	W3 0 White Steel Reflector W3 5 White Steel Reflector Asymmetric	DMV 0-10V MV Multi - Volt 120V-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K

*Consult for more options



Catalog Number:
Notes: