


LED Combo Exit/Emergency Sign

DIMENSIONS

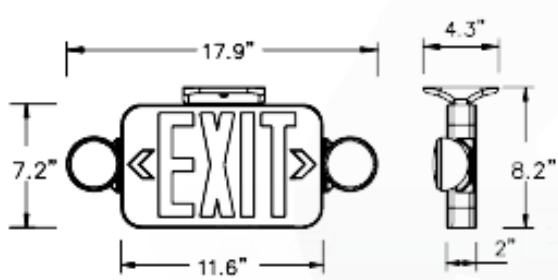

APPLICATION

The LCXS is a newly designed Emergency/Exit Light combining LED exit illumination with reliable LED lamp heads, this attractive low-profile design offers maintenance-free, long life dependable service. LCXS LED Combo unit is ideal for applications requiring both exit and emergency lighting. It's streamlined height makes the combo unit a great fit for above-the-door and other tight-fit applications.

FEATURES

- Push-to-test Switch.
- LED Charge Indicator.
- Ni-Cad Premium Battery.
- Dual Voltage 120V/277V.
- Universal Mount.
- Long Life Energy Saving LED light source for both exit and emergency heads.
- Field replaceable snap out/in chevron directional indicator.
- Universal single face and double face (extra faceplate included).
- Fully adjustable glare free lighting heads.
- Universal mounting pattern knockout in backplate for J-box mounting.
- Injection-molded, V-O flame retardant, high impact thermoplastic

HOUSING

Injection molded, engineering grade 5VA flame retardant, high impact resistant thermoplastic in white or black finish.

MOUNTING

Easy snap thermoplastic mounting canopy included for top or end mounting. Universal knockout pattern on back plate for wall mounting.

ELECTRICAL

Dual 120/277 voltage. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 3.6 long-life, maintenance -free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to the LED lamp head for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharging a discharged battery in 24 hours.

LISTING

Meets UL924, NFPA 11 Life Safety Code, NEC, OSHA Local and State Codes. UL listed for damp locations (0° C - 50° C)

WARRANTY

5-year limited warranty on all electronics and housing. Battery pro rated for 5 years.

QUICK SHIP

LCXS-2-W-G
LCXS-2-W-R

ORDERING INFORMATION

Example Model Number: LXCS-2-W-R-SD

SERIES	FACES	HOUSING	LETTERING	OPTIONS
LCXS	2	W - White B - Black ¹	R - Red G - Green	SD - Self Diagnostic ¹ RC - Remote Capable ¹

Notes:

¹Made to order items. Minimum 90 day lead time. Minimum 500 order quantity.

²DLC Listed

³DLC Premium Listed