



JOB NAME:

CAT#:

TYPE:

APPLICATIONS

This LED Indirect linear luminaire is available in 4' and 8' lengths. Low profile 2.1" height and 7.9" wide features a choice of die-cast end caps (spade standard).

The die-formed steel housing is available with solid or perforated bottom, with riveted, heavy duty, die-cast aluminum mounting plates. The end caps are die-cast aluminum and are factory installed. Housing and end caps are standard with our exclusive finish featuring an ultra durable white powder top coat. Custom finishes available.



Individual luminaires come with 2 "spade" end caps factory installed and function as a stand alone luminaire. Luminaires can also be combined in long runs joining together starters, runners and ends. Starters and ends have a single "spade" end cap factory installed. Standard feed points are located at the starter. Feed points can be placed at any of the runners to suit building layout or if required to meet electrical loads on longer runs.




FEATURES & BENEFITS

- 4 ft. - 7" x 48" x 2.0"
- 8 ft. - 7" x 96" x 2.0"
- Die-cast aluminum ends - factory installed, spade style with wing design available
- Mount with 4' adjustable cable (2 for 4' unit or 8' unit, included) Consult factory for longer cables.
- Highest quality long life LED
- Double the life expectancy of fluorescent technology
- cETL_{US} Listed
- 5 year warranty

DIMENSIONS

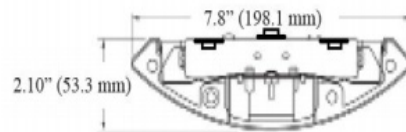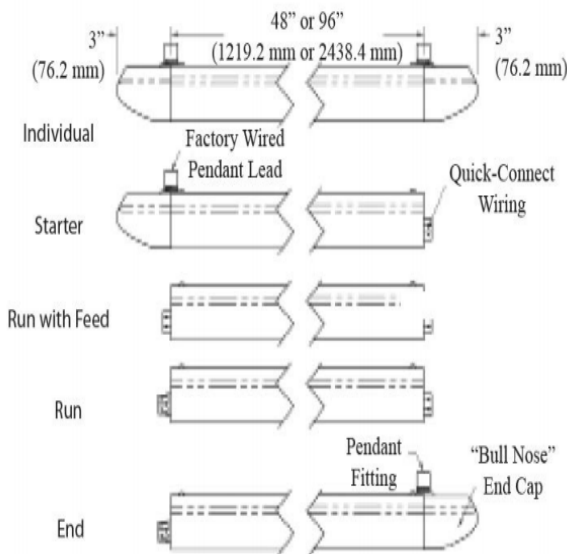

Uplight and Downlight LED module distribution

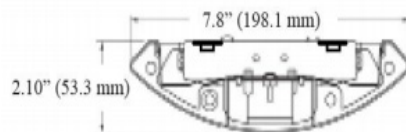

Downlight LED module distribution

Dimensions and specifications subject to change without notice.





JOB NAME:

CAT#:

TYPE:

ORDERING

EXAMPLE: LI B 48 LED 57 DMV SL 30 BN

LI		LED								
1. SERIES	2. BODY STYLE	3. LENGTH	4. GEAR	5. DISTRIBUTION	6. WATTAGE/LUMENS	7. DRIVER	8. FINISH			
LI LED Linear Indirect	Blank Perforated	48 48"	LED	Blank Uplight only	4 ft.		DMV 120-277V Multivolt 0-10V Dimmable	WH White (std.)		
	B Louver	96 96"			2U1D 2/3 Uplight by wattage, 1/3 Downlight by wattage	48 48W 4000 Lumens			SL Metallic Silver	
	S Matte White Lens					57 57W 4500 Lumens				RD Red
	SD Solid					H72 72W 5700 Lumens				
			H85 85W 6550 Lumens	SDMV Step Dimming 120-277VAC 100%-40%	BK Black					
					8 ft.		BZ Bronze			
					97 97W 7900 Lumens					
					114 114W 8950 Lumens					
					H114 144W 11500 Lumens					
					4 ft. Up and Downlight					
					36 36W 2400U-1200D					
					54 54W 3600U-1800D					
					8 ft. Up and Downlight					
					72 72W 4800U-2400D					
					108 108W 7200U-3600D					

Lumen outputs are approximate and vary by body style.

9. COLOR TEMP	10. NOSE(O) ¹	11. HANGING KIT(O) ¹	12. PLUG IN OPTIONS(O) ¹	13. CONFIGURATION				
30 3000K	BN Bull-nose	H4W Cable kit with 4' cable & power feed. Cable incl.w/white canopy (3 wire) ² non-dimming	PI1 3 wire harness, including white, black and green	Blank Individual				
35 3500K					H12W Cable kit with 12' cable & power feed. Cable incl. w/white canopy (3 wire) ² non-dimming	PI2 4 wire harness, including white, black, green and blue for emergency battery backup		
40 4000K							H4W5 Cable kit with 4' cable & power feed 0-10V. Dimming. Cable incl. w/white canopy (5 wire)	-B Beginner Run
50 5000K								
		-J Joiner						

NOTE:

¹O is Optional

²Consult factory for options

4ft cable & 4 ft power feed cable included

Spade ends are standard. Add BN for bullnose to end of part number

Lumen outputs are approximate and vary by body style.

Dimensions and specifications subject to change without notice.

