

REL7LED

120V-277V Universal Voltage

Catalog #:


Type

Project:

Date

Prepared by:

Outdoor Die Cast Emergency

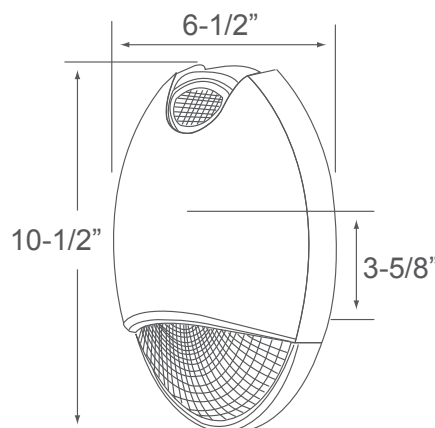

DESCRIPTION

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 12 hours.

DESIGN FEATURES

Construction

- Die-cast aluminum housing
- Compact, low-profile design
- General lighting and emergency lighting

Electrical

- 120V-277V Universal Voltage
- Built-in photocell sensor
- Contains 6V, 5Ah Ni-Cad rechargeable battery
- 90 minutes operation during power failure
- Automatic low voltage disconnect protects against deep discharge
- Long-life LEDs and electrical driver
- Equipped with test switch (a test switch pilot light)
- Self-diagnostic / self test
- 50,000 hour projected life
- 6V, 2x7W LED lamps (5000K, 1300lms) included
- Option for Sensor or Wall Switch function

Installation

- Simple one-person installation with included mounting hardware

Lens

- Polycarbonate lens and mirror reflector with flame rating (UL94V-0)

Finish

- Oil Rubbed Bronze or White finish

Available options

- REL7 – Operating temp range: 0°C (32°F) to 50°C (122°F)
- REL7-C – Operating temp range: -18°C (0°F) to 50°C (122°F)

Certifications

- UL/cUL listed for wet locations
- IP55 rating for use in outdoor wet location



TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.



RP LIGHTING • FANS

REL7LED

120V-277V Universal Voltage

Specification & Ordering



Model #	Dimensions (H x W x D)	Watts	Lumens	Finish
REL7LED-OB	10-1/2" x 6-1/2" x 3-5/8"	14W	1300lm	Oil Rubbed Bronze
REL7LED-OB-C Cold Weather				Oil Rubbed Bronze
REL7LED-WH				White
REL7LED-WH-C Cold Weather				White

ORDERING

Example: REL7LED-OB-C

Model #	Finish	Cold Weather Option
REL7LED		
REL7LED	-OB : Oil Rubbed Bronze -WH : White	-C : Cold Weather Heatpad

REL7LED

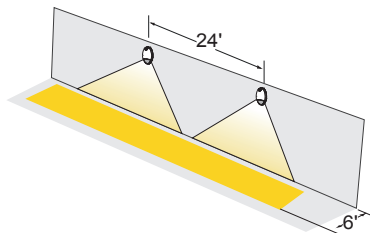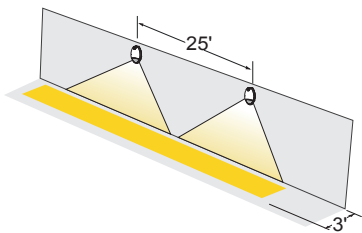

TEL: 800.937.6925 | Fax: 800.207.9509 | www.rplighting.com

Specifications and dimensions subject to change without notice.