

LED
TECHNOLOGY


50,000 Hours Life, 42Watt, 120V 60Hz

Applications:

Garages, Work Areas, Work Benches

Features:



- Instant On To Full Brightness
- Lasts Up To 45 Years (50,000Hrs)
- No Lamps To Purchase Or Replace
- No Humming
- Mercury Free Lamp Compared To Fluorescent
- Hanging Hardware Included
- Includes On/Off Pull Chain Switch
- 5 Foot Power Cord
- Can be surface mounted on ceiling or wall
- No-Glare smooth diffused light no visible chips.

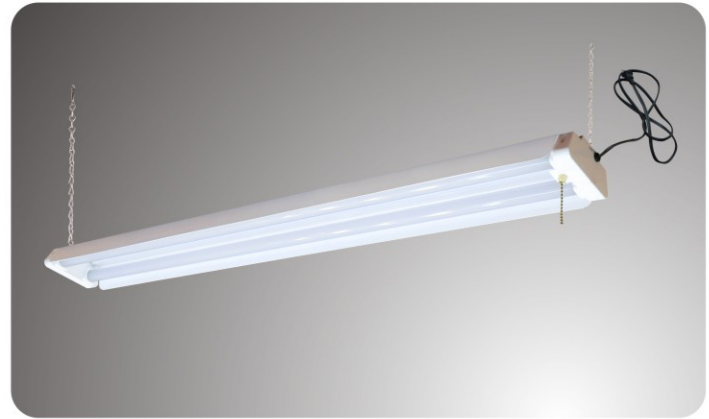

Specification:

Input Line Voltage:	120VAC
Input Power	42W
Input Line Frequency	50/60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-21°C/-6°F
Maximum Operating Temp	54°C/130°F
CCT	4000K
CRI	≥80
CBCP	1100
Beam Angle	120°
Lumens	4000

LED: LM-80 Certified High Performance Bridgelux LED Chips
DRIVER: Constant-current LED power supply.

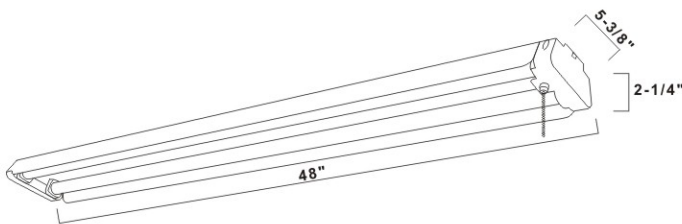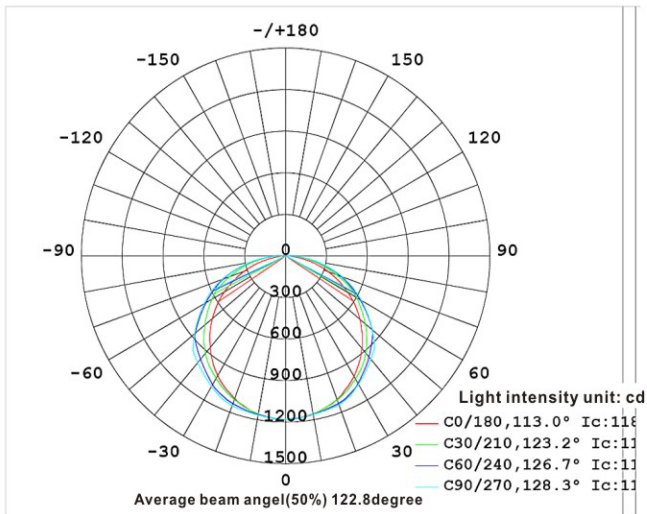

Height	E Avg/E Max	Beam Angle 113.09° Deg	Diameter
1m	365.1, 11951x		302.68cm
2m	91.28, 298.71x		605.36cm
3m	40.57, 132.71x		908.04cm
4m	22.82, 74.671x		1210.72cm
5m	14.60, 47.791x		1513.39cm
6m	10.14, 33.191x		1816.07cm
7m	7.451, 24.381x		2118.75cm
8m	5.705, 18.671x		2421.43cm
9m	4.508, 14.751x		2724.11cm
10m	3.651, 11.951x		3026.79cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

2-YEAR *

Model:#	Description	wattage	lumens
SH4842P-LED	4 Ft Shop Light Fixture, Cool White	42	4000

*2 Years Limited Warranty

UPC: 80680215447-3

