


Series TSSKD

Telescopic Staggered Strip, Mini Body

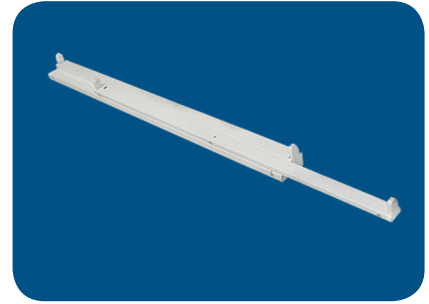

FEATURES & SPECIFICATIONS

INTENDED USE

Specification grade, dual lamp strip for interior coves, valances, and displays requiring lighting without dark areas at lamp ends. Mini body style. Fixture telescopes to maintain a uniform distribution of light especially

SIZE W x L x H in inches (mm)

2.5W x 1.25H (63 x 32)

Fixture length defined in ordering table.

LAMP

2 lamp positions.

MATERIALS & FEATURES

Housing is die-formed and embossed code 22 gage steel. Finish is high reflectance baked white enamel. Wiring knockouts are provided on back and end of housing. Fully open, fixture stagger is as follows:
2' = 10", 3' = 20", 4' = 26"

- Mini body style for areas with minimum clearance.
- Available with T5 or T8 lamp styles.
- Offset provides continuous row lighting.

MOUNTING

Surface mount or Suspended

LISTING

Fixture and Ballast: UL Listed.

Ballast: Thermally protected, class P, HPF, Non PCB; unless specified otherwise.

TYPICAL OPTIONS AND ACCESSORIES

Whips, fuses, and cord sets. See options page at the end of the T02Strip section, or contact factory for more details.

ORDERING INFORMATION

Example: TSSKD254MV

TSSKD	2	54	MV
	(Lamps not included)		
Series	Lamp Count	Lamp Type [1]	Ballast & Voltage [1]
TSSKD Telescopic Staggered Strip	2	14 14W T5 Fixture Length = 26.5 in.	E120 Electronic, 120V
	2	21 21W T5 Fixture Length = 38.25 in.	E277 Electronic, 277V
	2	28 28W T5 Fixture Length = 50.0 in.	MV Electronic, Multivolt (120-277)
	2	35 35W T5 Fixture Length = 62.0 in.	H120 [2] Electronic, 120V, Hi-Lume
	2	24 24W T5HO Fixture Length = 26.5 in.	H277 [2] Electronic, 277V, Hi-Lume
	2	39 39W T5HO Fixture Length = 38.25 in.	HMV [2] Electronic, Multivolt, Hi-Lume
	2	54 54W T5HO Fixture Length = 50.0 in.	L120 [2] Electronic, 120V, Lo-Lume
	2	80 80W T5HO Fixture Length = 62.0 in.	L277 [2] Electronic, 277V, Lo-Lume
	2	17 17W T8 Fixture Length = 28.0 in.	LMV [2] Electronic, Multivolt, Lo-Lume
	2	25 25W T8 Fixture Length = 40.0 in.	
	2	32 32W T8 Fixture Length = 52.0 in.	
			Options [1]
			WP 6 ft. 3 wire 18 gauge whip
			CS 8ft. 3/18 3 prong (5-15P) cord & plug

Notes

[1] See end of T02Strip section for many additional lamps, ballasts, finishes, and options.

[2] HiLume and LoLume ballasts available for t8 lamps only.

Catalog Number:
Notes: